

C600

Specifications



Lifting capacity single circuit:	600 kg
Lifting capacity double circuit:	300 kg
Rotation range:	Endless, with four locking positions
Tilting range:	90° with six locking positions
Machine weight:	30 kg
Suction cup dimensions:	800 x 480 mm
Machine height:	200 mm
Battery:	12VDC, 9Ah

C600

Specifications

The vacuum lifter for glass up to 600 kg single circuit. Standard equipped with a double circuit for loads up to 300 kg. The machine itself weighs just 30 kg.

All our products are designed in close cooperation with users from the field. This results in products that are a class apart when it comes to the details and provide the user with every convenience in daily use.

Unique features

- Lightweight design (30 kg)
- Dual vacuum system for maximum safety
- 360° endless rotation with locking positions
- Compact size for easy transport and handling

Delivered standard with:

- Remote control
- Transport trolley
- Protective cover
- Exchangeable lifting arm
- Exchangeable battery system incl. spare battery



Battery



Charger



Remote control



Exchangeable
lifting arm




Trolley &
PVC cover

HOEFLON®



Specifications

- Angle adjustment specially intended for interior glazing
- Rotation with four locking positions
- Radio remote control of suction and release
- Transport trolley with pneumatic tyres

Dimensions

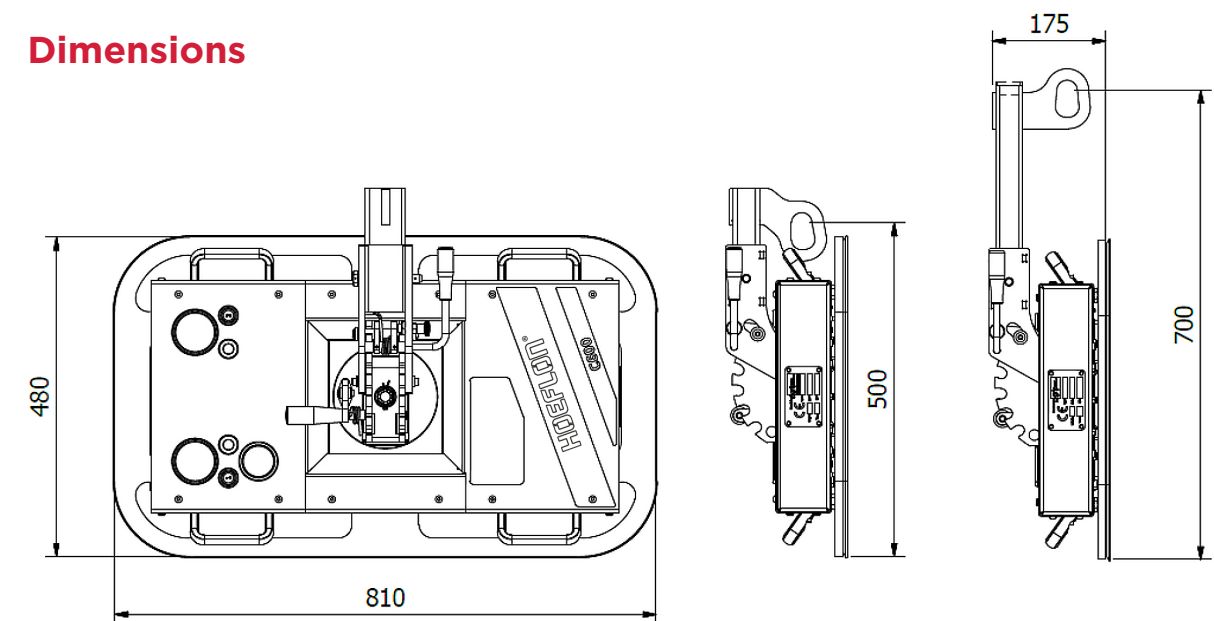

In-use

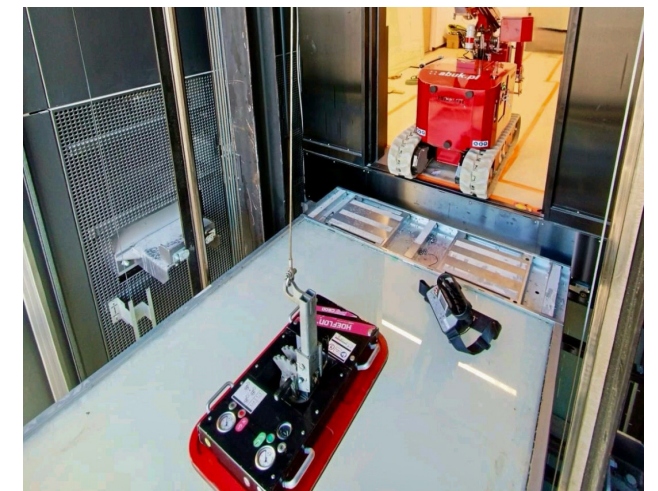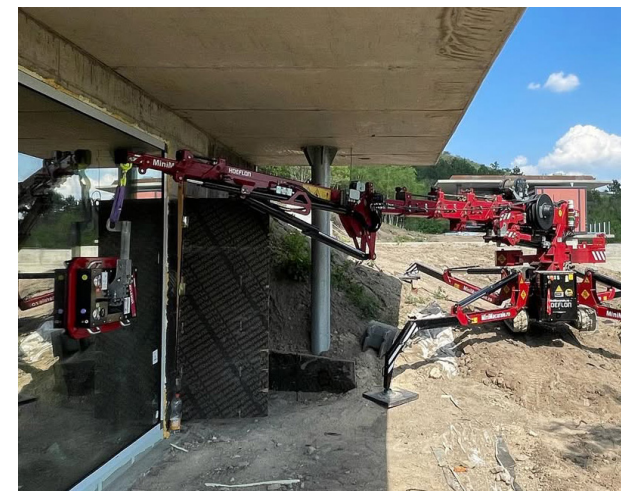

See what the C600 can do for you

Hoeflon glass lifters are built for precision, safety, and ease of use: ready to support any lifting challenge on your job site. Interested in seeing the performance for yourself or receiving more information? Get in touch to request a demo or quote.

